
## **HYDRAULIC POST TABLE - HT-20-3248**

APPROX WEIGHT: 379.32 lbs.

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON.

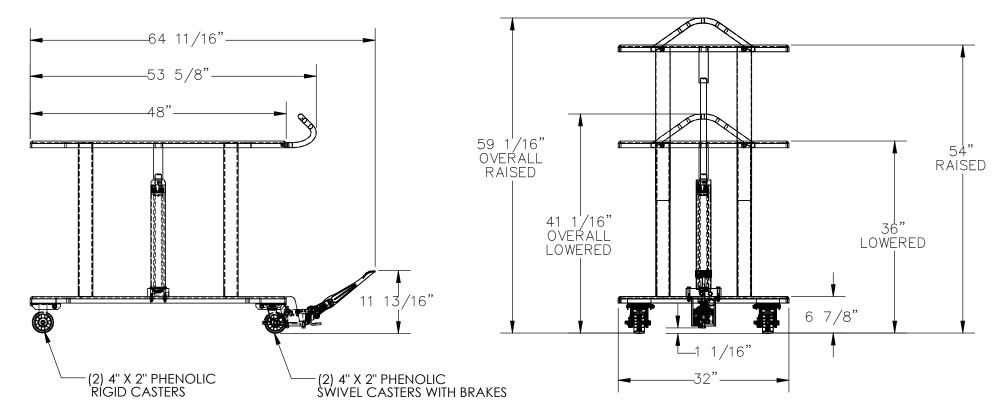

## HYDRAULIC HOSES NOT SHOWN

## STANDARD FEATURES

MODEL NUMBER IS HT-20-3248 MAX CAPACITY IS 2,000 LBS. **OVERALL WIDTH IS 32" USABLE WIDTH IS 32" OVERALL LENGTH IS 64 11/16" USABLE LENGTH IS 48" RAISED HEIGHT IS 54"** LOWERED HEIGHT IS 36" **OVERALL RAISED HEIGHT IS 59 1/16" OVERALL LOWERED HEIGHT IS 41 1/16"** (2) PHENOLIC RIGID CASTERS (2) PHENOLIC SWIVEL CASTERS WITH BRAKES

SPECIAL FEATURES

NONE

DIMENSION TOLERANCE ± 1/4"						
A P P R O V	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.  ANY MODIFIED UNITS ARE NON-RETURNABLE  [ ] As drawn [ ] As marked					
4	Signed:Date:					
L	Printed Name:					

			LEAD HIVE WILL START	OI ON NECELII I OI OI	UNLU AL I NOVAL DIVAVIINO
	FOR INTERNAL USE ONLY		DISTRIBUTOR'S NAME:		P.O.# X
	PROJECT SIGN OFF		VESTIL MANUFACTURING		W.O.# V
	SALES			DATE:	\$ A1 E2.
	ENG.		DRAWN BY: TAW	4/19/201	
	FAB.		reference: X		:: 1:18 FILE NAME:
	POWER		QUOTED LEAD TIME: $\chi$	QUOTE #	21-007-066