
HYDRAULIC POST TABLE - HT-60-3248

APPROX WEIGHT: 570.47 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

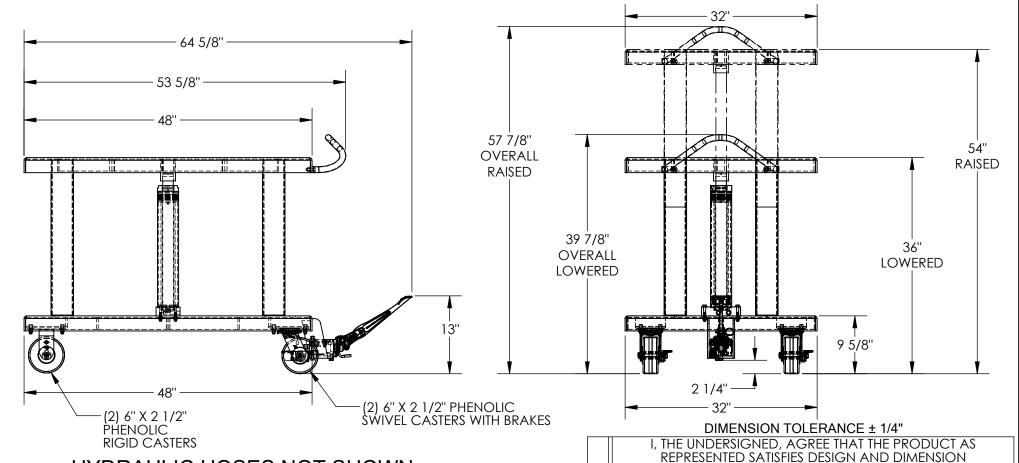

Α

P

P

R

0

٧

Signed:

HYDRAULIC HOSES NOT SHOWN

STANDARD FEATURES

MODEL NUMBER IS HT-60-3248 CAPACITY IS 6,000 LBS. **OVERALL WIDTH IS 32" USABLE WIDTH IS 32" OVERALL LENGTH IS 64 5/8" USABLE LENGTH IS 48"** RAISED HEIGHT IS 54" **LOWERED HEIGHT IS 36" OVERALL RAISED HEIGHT IS 57 7/8"** OVERALL LOWERED HEIGHT IS 39 7/8" (2) PHENOLIC RIGID CASTERS (2) PHENOLIC SWIVEL CASTERS WITH BRAKES

TOUGH BAKED IN POWDER COATED BLUE FINISH

SPECIAL FEATURES

NONE

| | | Printed Name: LEAD TIME WILL START UPO | ON RECEIPT OF SIG | SNED A | APPROVAL DRAWING |
|------------------|---------------|---|-------------------|--------------------|------------------|
| FOR INTE | RNAL USE ONLY | | | P.O.# X | |
| PROJECT SIGN OFF | | VESTIL MANUFACTURING | | W.O.# _v | |
| SALES | | | | | ^ |
| ENG. | | | DATE: 03/25/20 | 16 | SALES: X |
| FAB. | | reference: X | SCALE: | : 1:16 | FILE NAME: |
| POWER | | QUOTED LEAD TIME: X | QUOTE # X | | 21-007-048 |

[] As drawn

REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO

CONFIRM PRODUCT AND INSTALLATION

COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE

AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE

[] As marked

Date: