
## WORK PLATFORM- WP-3636 \*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*

APPROX WEIGHT: 173.17 lbs.

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

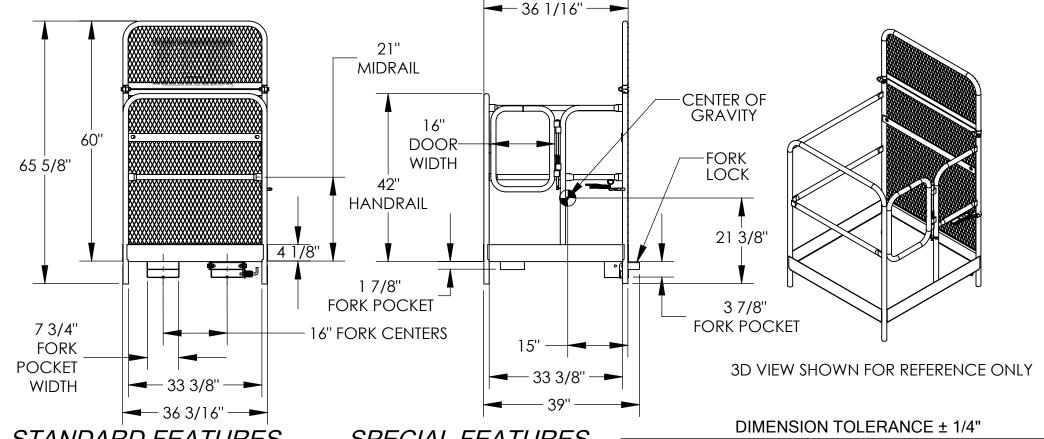

## STANDARD FEATURES

SPECIAL FEATURES NONE

MODEL NUMBER IS WP-3636 CAPACITY IS 1,000 LBS. (EVENLY DISTRIBUTED LOAD) OVERALL WIDTH IS 36 3/16" USABLE WIDTH IS 33 3/8"

**OVERALL LENGTH IS 39" USABLE LENGTH IS 33 3/8"** 

42"HIGH HANDRAIL WITH 21" MIDRAIL AND 4 1/8" TOEBOARD SELF-CLOSING DOOR SWINGS IN ONLY (WILL NOT OPEN OUT)

FORK LOCK IS ROTATED UP BEHIND BACK OF FORK

AND LOCKED WITH SPRING LOADED PLUNGER

36" LONG STRAP WITH HOOK (NOT SHOWN) MUST ATTACH PLATFORM TO FORK TRUCK

60" HIGH EXPANDED MESH BACKING

USABLE FORK POCKET HEIGHTS: 3 7/8" REAR, 1 7/8" FRONT

**USABLE FORK POCKET WIDTH: 7 3/4"** 

MANUFACTURED TO MEET OUR INTERPRETATION OF OSHA STANDARDS TOUGH BAKED IN POWDER COATED ERGO BLUE FINISH

**NEVER EXCEED LOAD CENTER RATING** PER FORK TRUCK MANUFACTURER'S GUIDLINES. DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING.

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS
REPRESENTED SATISFIES DESIGN AND DIMENSION
REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO
CONFIRM PRODUCT AND INSTALLATION
COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
AND LOCAL REGULATIONS AND STANDARDS.
ANY MODIFIED UNITO ADE NON DETUDNADI

## ANY MODIFIED UNITS ARE NON-RETURNABLE [ ] As drawn [ ] As marked

Signed: Date:

Χ

**Printed Name:** LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DRAWN BY: C.WOLF

R

0

Α

**VESTIL MANUFACTURING** 

W.O.# SALES: X

**SALES** ENG.

**POWER** 

FAB.

FOR INTERNAL USE ONLY PROJECT SIGN OFF

DATE: 08/<u>31/06</u> SCALE: 1:24 FILE NAME: QUOTED LEAD TIME: Y QUOTE #

14-007-001