


WINCH OPERATED TRUCK JIB CRANE WTJ-4-G

** Any additions, deletions or omissions must be corrected on this drawing, as this drawing will be considered all inclusive. **
 ** All graphics provided are for reference only. If certain dimensions are critical please verify those dimensions with your salesperson **

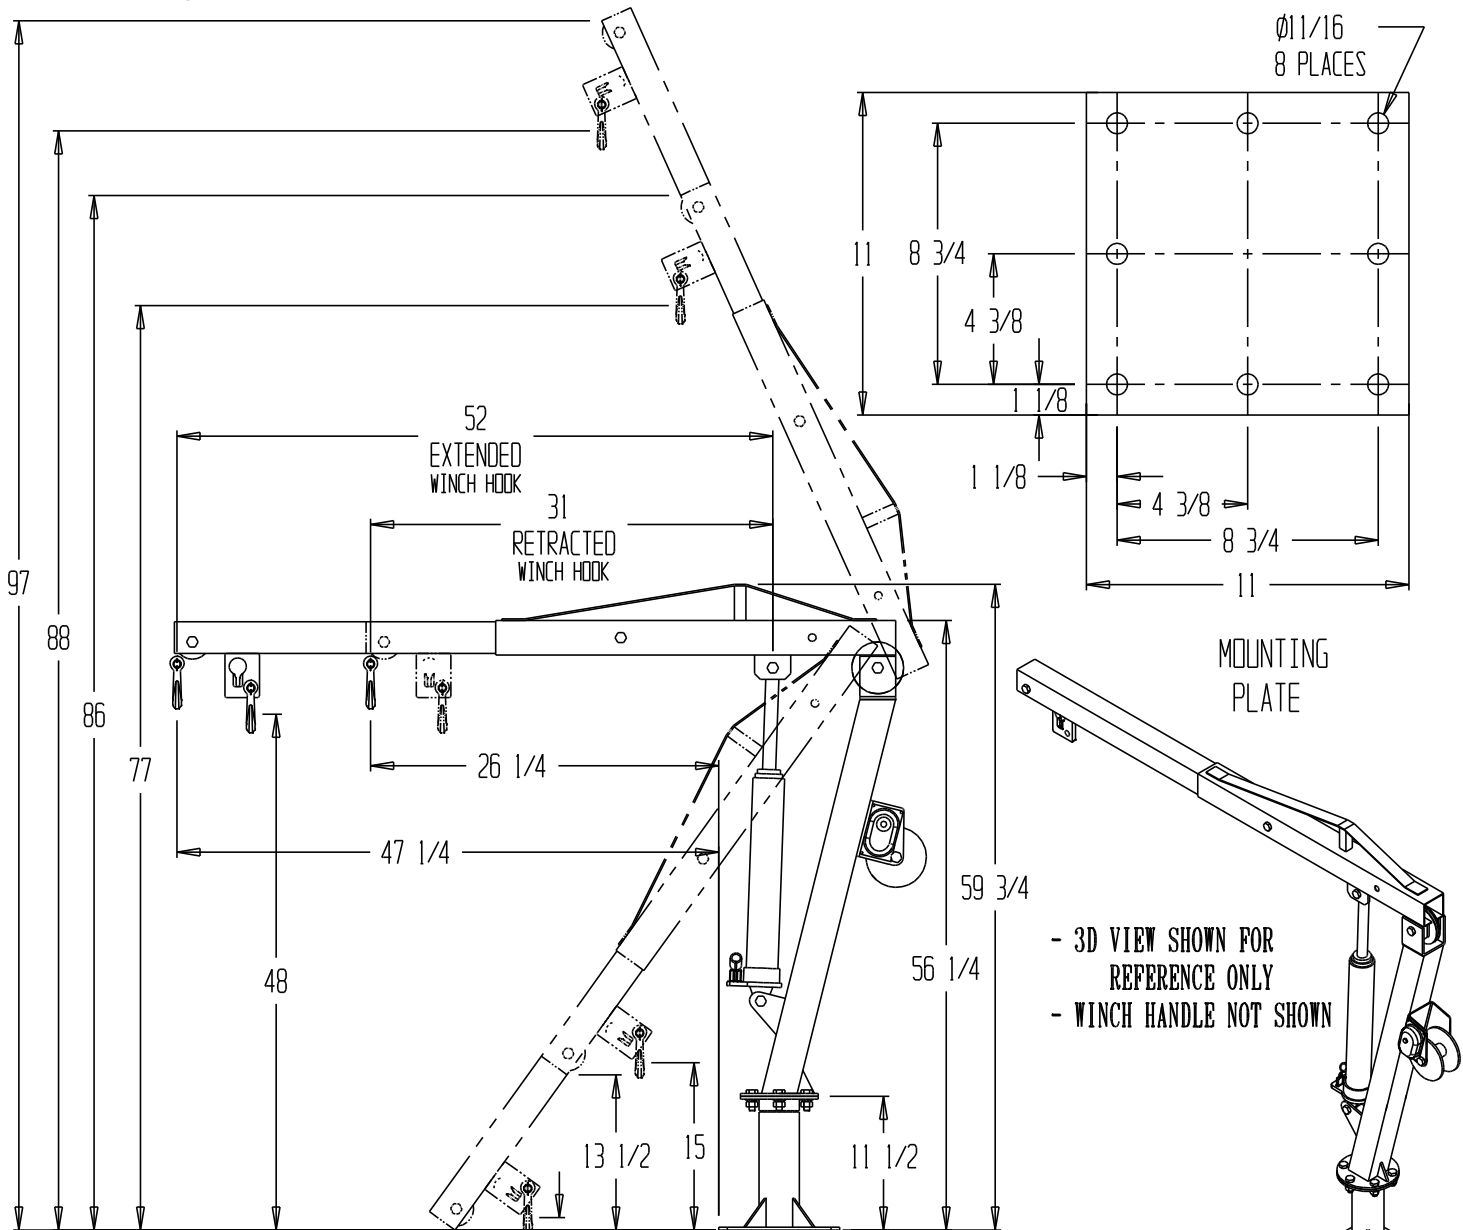

STANDARD FEATURES

- MODEL NUMBER: WTJ-4-G
- LIFTING BALE CAPACITY: 1,000 LBS. EXTENDED, 2,000 LBS. RETRACTED
- HOOK CAPACITY: 500 LBS.
- MAX WINCH CAPACITY: 500 LBS.
- USABLE REACH: 52" EXTENDED, 31" RETRACTED
- MAX HOOK HEIGHT: 97" EXTENDED, 86" RETRACTED
- MIN. HOOK HEIGHT: 0" EXTENDED, 13 1/2" RETRACTED
- OVERALL CABLE LENGTH: 32 FEET
- USABLE CABLE LENGTH: 24 FEET
- PISTON STROKE: 16 3/8"
- PISTON STROKE PER PUMP: 1/16"
- CABLE RETRACTS / EXTENDS PER CRANK: 1-1/2"
- NO. OF CRANKS TO RETRACT / EXTEND CABLE: 72
- GALVANIZED STEEL FINISH

DIMENSION TOLERANCE +/- 1/2"

**SPECIAL UNITS ARE NON-RETURNABLE
 *AVAILABLE AT ADDITIONAL COSTS

**NOTE: HOOK CENTER HEIGHTS MAY VARY DEPENDING ON HOOK TYPE

All graphics provided are for reference only.
 If certain dimensions are critical please verify those dimensions with your salesperson

A P P R O V A L

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN & DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT & INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS & STANDARDS.

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE
 () As drawn () As marked

Signed: _____ Date: _____
 Printed Name _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

SPECIAL FEATURES

NONE

DISTRIBUTOR'S NAME: VESTIL MANUFACTURING		P.O.#: -
DRAWN BY: ND		DATE: 2-2-16
REFERENCE: -	SCALE: -	SALES: -
QUOTED LEADTIME: -	QUOTE #: -	DRWG.#/FILE NAME: WTJ-4-G