
ROTARY AIR/HYDRAULIC SCISSOR LIFT TABLE - AHLT-4048-3-43 APPROX WEIGHT: 699.65 lbs. *** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON 40 3/8' 48 3/8' PNEUMATIC TOEGUARDS (STOPS 43" TABLE FROM LOWERING IF **RAISED** BUMPED) MEETS OSHA 1910.212

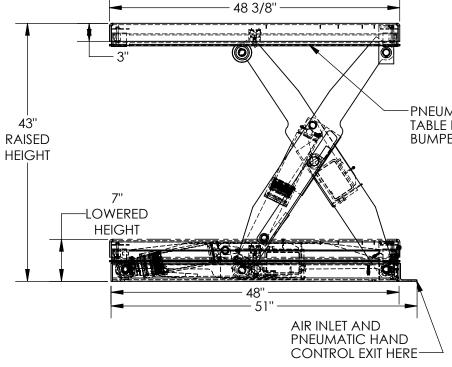

MAINTENANCE PROPS

ROTARY AIR / OIL POWER UNITS HAVE AN APPROX 1/2 GPM AT A MAXIMUM 3000 PSI

- AIR REQUIREMENTS 80 CFM @ 80 PSI WITH 3/4" DIAMETER AIR SUPPLY HOSE AT 50 FEET MAX
- NOISE LEVEL APPROX. 100 dB @ 6 FEET
- NOISE LEVEL APPROX. 90 dB @ 10 FEET
- * ALL ROTARY AIR / OIL POWER UNITS REQUIRE A FILTER / REGULATOR / LUBRICATOR (FRL)
- * FRLs ARE SOLD SEPARATELY

PLEASE CIRCLE SPECIFICATIONS:

HAND

- * WARRANTY WILL BE VOIDED IF FRL IS NOT USED
- *HAND CONTROLS ON 8FT LONG HOSE

DIMENSION TOLERANCE ± 1/4"

STANDARD FEATURES

MODEL NUMBER IS AHLT-4048-3-43 PLATFORM WIDTH IS 40 3/8" PLATFORM LENGTH IS 48 3/8" **OVERALL LENGTH IS 51"** PLATFORM RAISED HEIGHT IS 43" PLATFORM LOWERED HEIGHT IS 7" TABLE CAPACITY (EVENLY DISTRIBUTED) LOAD IS 3,000 LBS CONTROL IS HANDHELD, 2 BUTTON PENDANT WITH MAXIMUM 8' PNEUMATIC CONTROL SAFETY MAINTENANCE PROPS. DISPLACEMENT STYLE CYLINDERS INSTALLED ROD DOWN **EMERGENCY SAFETY STOP HYDRAULIC FUSES** IN ALL CYLINDER UNITS

INTERNAL POWER UNIT DURABLE LIQUID PAINT BLUE FINISH

SPECIAL FEATURES

NONE

DECK TOLERANCE ± 1/2" TABLE HEIGHT TOLERANCE ± 1/2" DECK FLATNESS ± 1/4"

POWER

MOTOR VOLTAGE +

MOTOR PHASE

CONTROL



ADJUSTABLE UPWARD

TRAVEL LIMIT SWITCH

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE [] As marked

Signed: Date:

Printed Name:

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION

DISTRIBUTOR'S TYAME.		" · · · · χ
		W.O.# X
DRAWN BY: CRA	DATE: 03/08/2019	SALES: X
reference: X	SCALE: 1:16	
QUOTED LEAD TIME: Y	QUOTE #	24-007-051-102